

Logic Controls LV OPOS for LV3000/LV4000 User Manual

I. Introduction

Logic Controls' LV OPOS software enables LV3000 and LV4000 to work as a traditional 2 lines pole display using OPOS.

II. Setup


1. Install LV3000 / LV4000 driver first (please install the driver when device is not unplugging it).
2. Install the LCI OPOS software, simply run regdll.bat to setup the program.
3. Run LVUtility.exe while the device is plug in, it will add program icon to taskbar when

you run the program



4. You device is now ready to use.
5. You will also need to know the device name which will be used in your software. The default device name is "LC-LV". If you want to change its device name, you can follow the steps below.

III. LCI VPD setup

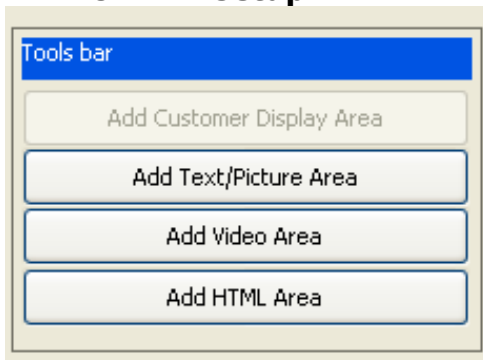

Double click LCI VPD icon to bring the setting up:

You can add text/Picture/Video/Html areas in this OPOS utility, and change its font / fonts color, change background color here.

Note:

The Text/Picture set up texts and pictures, it also supports multiple texts and pictures, and it will be display according to the timer. For this Text/Picture Area, it also support displaying clock, simple check the "show as clock" check box.



Export and Import: LV OPOS utility can export and import your configuration setting as xml file. We have default setting ready in the installation package. If you are going to change the default setting, please read readme.txt file in that folder.